

# ERT SERIES

ELECTRIC POWERED ROUGH TERRAIN  
SCISSORS



## Performance

|   |               |          |
|---|---------------|----------|
| • Platform Height—Elevated<br>ERT2669                         | 26'2"         | 8 m      |
| • Platform Height - Lowered<br>ERT2669                        | 4'3"          | 1.3 m    |
| • Platform Capacity (Single Extension)<br>ERT2669             | 1,500 lb      | 680 kg   |
| • - Capacity on Deck Extension                                | 300 lb        | 136 kg   |
| • No. Occupants (Indoor/Outdoor)<br>ERT2669                   | 4/4           |          |
| • Lift/Lower Time<br>ERT2669                                  | 36/28 seconds |          |
| • Maximum Drive Height  | Full Height   |          |
| • Weight (single extension w/out leveling jacks) *<br>ERT2669 | 8,627 lb      | 3,913 kg |
| • Drive Speed—Lowered   | 3.5 mph       | 5.6 km/h |
| • Drive Speed—Elevated  | 0.5 mph       | 0.8 km/h |
| • Gradeability<br>ERT2669                                     | 40%           |          |
| • Turning Radius (Inside)                                     | 83"           | 2.1 m    |
| • Turning Radius (Outside)                                    | 175"          | 4.44 m   |



\* Certain options or country standards will increase weight.  
\*\* ERT4769 Includes a Push-Button Manual Descent System



## Standard Features

- 42 in/1.06 m Roll-out Deck Extension
- Moveable, Removable Platform
- Nickel Plated Pins, Yellow Zinc-Chromate Plated Fasteners
- Pin-Less Fold Down Rail System
- Platform Control Box with LCD Display, USB Charger and Phone Holster
- Self-closing Gate
- Full Time Traction Control
- Lubrication-Free Scissor Arm Bushings
- Manual Descent Pull Cable \*\*
- Oscillating Front Axle
- Scissor Maintenance Prop
- Tie Down Lugs
- 26 x 12 Foam Filled Non-Marking Tires
- 220V-AC Receptacle In Platform
- 23 Amp Automatic, SCR Battery Charger
- 8 x 6V, 225 Amp-Hour Batteries (ERT2669, ERT3369)
- 8 x 6V, 310 Amp-Hour Batteries (ERT4069)
- 8 x 6V, 375 Amp-Hour Batteries (ERT4769)
- All Motion Alarm
- Descent Alarm
- Horn
- Hourmeter
- 2WD AC Drive System
- Proportional Lift and Drive
- LCD Display with LiftSense System
- Pin-based Load Sensing System
- Telematics-Ready Harness
- 2WD

## Standard Specifications

|                           |                     |
|---------------------------|---------------------|
| • Drive (2WD)             | AC Electric Drive   |
| • Tire size (non-marking) | 26 x 12 Foam Filled |
| • Hydraulic Reservoir     | 13.2 gal (50L)      |

## Accessories & Options


- Hydraulic Leveling Jacks (Auto Level)
- 26 x 12 Foam Filled Lug Tread Tires
- 8 x 6V, 310 Amp-Hour Batteries (ERT2669, ERT3369)
- 8 x 6V, 375 Amp-Hour Batteries (ERT4069)
- Flashing Amber Beacon - LED
- Dual Flashing Amber Beacons - LED
- White Noise Backup Alarm
- JLG CleanGuard
- Special Hydraulic Fluids
- Special Paint
- ClearSky™
- Operator Access Control
- Generator Set (Kubota Stage V OC60-E4) 6hp (4.5kW)
- Heavy Duty Pipe Racks
- Platform work lights

# ERT SERIES

## ELECTRIC POWERED ROUGH TERRAIN SCISSORS

### Dimensions

All dimensions are approximate.

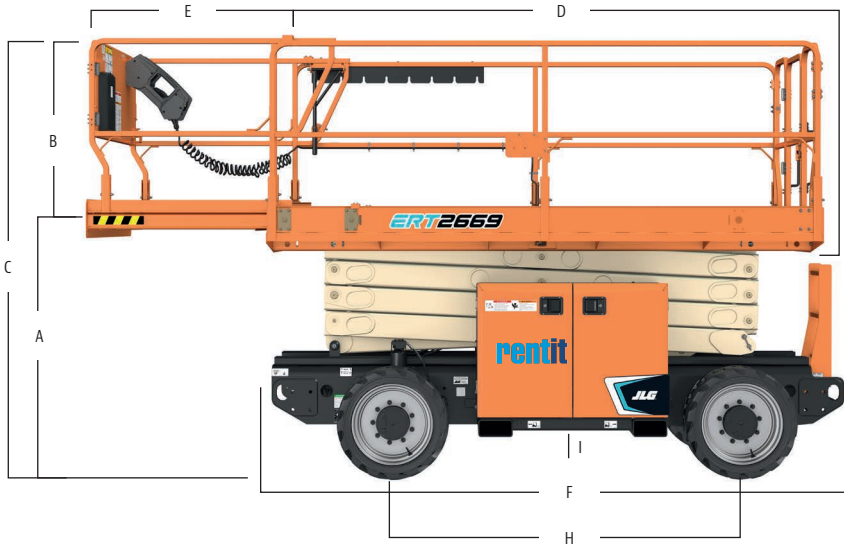

|   |       |        |                                |              |             |
|---|-------|--------|--------------------------------|--------------|-------------|
| • Platform Height - Elevated<br>ERT2669   | 26'2" | 7.98 m | • C. Overall Height<br>ERT2669 | 44.7"        | 1.14 m      |
| • A. Platform Height - Lowered<br>ERT2669 | 4'3"  | 1.3 m  | • D. Platform Dimensions       | 130.5" x 63" | 3.3 x 1.6 m |
| • B. Platform Railing Height*             | 44.7" | 1.14 m | • E. Platform Extension        | 42"          | 1.07 m      |
|   |       |        | • F. Overall Machine Length    | 139"         | 3.53 m      |
|   |       |        | • G. Overall Machine Width     | 69.3"        | 1.76 m      |
|   |       |        | • H. Wheelbase                 | 81.3"        | 2.07 m      |
|   |       |        | • I. Ground Clearance          | 10.1"        | 25.7 cm     |

\* Fold Down Rails

| Modell             | Anheben und Fahren deaktiviert, wenn angehoben und geneigt – in Längsrichtung – über die folgenden Grenzen hinaus: | Anheben und Fahren deaktiviert, wenn angehoben und geneigt – von Seite zu Seite – über die folgenden Grenzen hinaus. |
|--------------------|--|--|
| RT2669,<br>ERT2669 | 3°   | 4,0° bei 0–55 % Kapazität  |
|                    |  | 3,0° bei 56–75 % Kapazität   |
|                    |  | 2,5° bei 76–100 % Kapazität  |



### IMPORTANT

JLG is continually researching and developing products and reserves the right to make modifications without prior notice. All data in this document is indicative. Certain options or country standards will increase weight. Specifications may change to meet country standards or with the addition of optional equipment.

Due to continuous product improvements, JLG Industries reserves the right to make specification and/or equipment changes without prior notification.



### JLG EMEA BV

Polaris Avenue 63  
2132 JH Hoofddorp  
The Netherlands  
Tel.: +31 (0)23 565 5665  
[www.jlg.com](http://www.jlg.com)

An Oshkosh Corporation Company