

ELECTRIC SCISSOR LIFTS

0407SE (1530SE) / 0607SE (1932SE)

Compliant with CE/ANSI/CSA/AS/EAC/KCS standards

rentit

PRODUCT HIGHLIGHTS

- Easily passes through standard doors and can access elevators
- The short design of sliding rail makes debris easy to clean
- Bumper rail and indented sliding rail designed for anti-scratch
- DC motor drive, giving a longer runtime




Standard Features

| | | |
|-------------------------|-------------------------------------|---------------------------|
| 2WD×2WS | Maintenance-free battery | Fault diagnosis system |
| Non-marking tires | Proportional control | Emergency lowering system |
| Emergency stop | Electrophoretic painting | Tilt protection system |
| Flashing beacon | Forklift pockets and lifting points | Overload sensing system |
| Foldable guardrail | Automatic pothole protection | Manual storage box |
| Drivable at full height | Bumper rails | Auto braking system |
| Horn & buzzer | | |

Options & Accessories

| | | |
|------------|--------------------------------|----------------------------|
| RCBO | AC power to platform | Platform work light |
| Footswitch | Overhead anti-collision device | Telematics-ready connector |

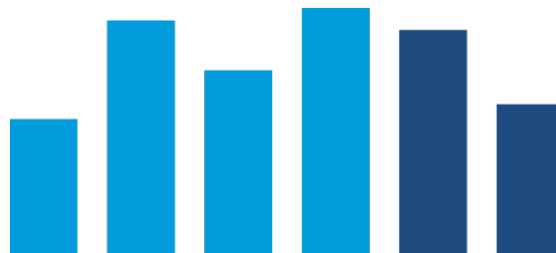

SINOBOOM™

PARTNERS IN ACCESS™

SINOBOOM.COM | SALES@SINOBOOM.COM

NO.128 EAST JINZHOU AV., NINGXIANG HI-TECH INDUSTRY PARK, CHANGSHA, HUNAN, CHINA, 410600

ELECTRIC SCISSOR LIFTS

0607SE (1932SE)

Compliant with CE/ANSI/CSA/AS/EAC/KCS standards



| Model | | 0607SE (1932SE) |
|--|--|--|
| Dimensions | | |
| Max Working Height(Indoor/Outdoor) | | 7.6 m/6.6 m (24'11.2"/21'8") |
| A Max Platform Height(Indoor/Outdoor) | | 5.6 m/4.6 m (18'4.5"/15') |
| B Platform Extension | | 0.6 m (2') |
| C Length-Stowed | | 1.52 m (4'11.8") |
| D Width-Stowed | | 0.81 m (2'7.9") |
| E Height-Stowed (Rails Folded) | | 1.77 m (5'9.7") |
| E Height-Stowed (Rails Unfolded) | | 2.1 m (6'10.7") |
| F Wheelbase | | 1.13 m (3'8.5") |
| Ground Clearance (Pothole Guard Stowed) | | 0.065 m (2.56") |
| Ground Clearance (Pothole Guard Deployed) | | 0.025 m (0.98") |
| Platform Size (L×W×H) | | 1.37 m×0.7 m×1.1 m (4'5.9"×2'3.6"×3'7") |
| Performance | | |
| Platform Capacity | | 230 kg (507 lbs) |
| Extension Platform Capacity | | 120 kg (265 lbs) |
| Max Platform Occupants (Indoor/Outdoor) | | 2 Persons (Indoor) 1 Person (Outdoor) |
| Drive Speed (Stowed) | | 0~4 km/h (0~2.5 mph) |
| Drive Speed (Raised) | | 0~0.8 km/h (0~0.5 mph) |
| Lift Time (Unloaded) | | 24s~28s |
| Lower Time (Unloaded) | | 22s~26s |
| Gradeability | | 25% |
| Max Allowable Inclination (front-to-back/side-to-side) | | 3°/1.5° |
| Turning Radius (Inside/Outside) | | 0.45 m/1.6 m (1'5.7"/5'3") |
| Tire Size/Type | | 255×76 mm (10×3.2") /solid |
| Power | | |
| Drive×Steer | | 2 WD×2 WS |
| Power Source (V/kW) | | 24 V/2.2 kW |
| Drive Motor (V/kW) | | 24 V DC/0.4 kW |
| Hydraulic Tank Capacity | | 4 L (0.9 gal (UK)/1.05 gal(US)) |
| Batteries | | 24 V,115 Ah (lead acid battery) |
| Charger (Input/Output) | | 100~240 V AC/15 A |
| Weight | | |
| Weight (Indoor/Outdoor) | | 1,210 kg (2,668 lbs) |
| Standards Compliance | | CE/EAC |

