



Breite	135 cm or 90 cm
Required resting platform at every*	4.00 meters
Required use of stabilisers from the following platform height	4.00 meters
Maximum permissible load per platform	250 kg
Maximum permissible load per tower	750 kg
Rung spacing	28 cm

Treppenturm

STAIR TOWER 135 CM						
Platform height (m)	2.2	4.2	6.2	8.2	10.2	12.2
Working height (m)	4.2	6.2	8.2	10.2	12.2	14.2
7-rung structural frame	1	3	5	7	9	11
2-rung railing frame	2	2	2	2	2	2
Walkthrough frame	1	1	1	1	1	1
Nylon wheel with steel spindle	4	4	4	4	4	4
Wooden platform without hatch	1	2	3	4	5	6
Diagonal strut	4	6	8	8	10	12
Horizontal strut	4	4	6	6	6	8
200 cm triangle stabiliser	2	2	-	-	-	-
300 cm triangle stabiliser	-	-	2	2	2	2
Railing	1	2	3	4	5	6
Inner stair railing	1	2	3	4	5	6
Outer stair railing	1	2	3	4	5	6
End stair railing	1	1	1	1	1	1
Mounting platform for stairs	1	1	1	1	1	1
Safety clip	4	8	16	20	20	24

Maximum permissible load per platform

250 kg

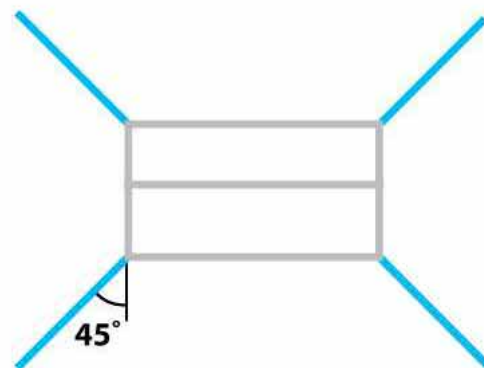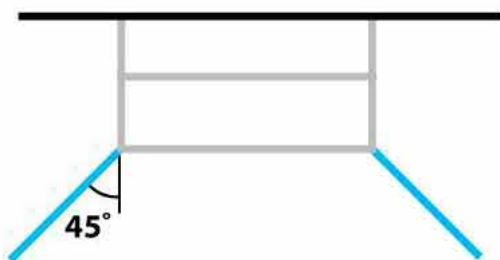

Gersüst Schmal

ROLSTEIGER 90 CM MET ENKELE VOORLOOPLEUNING

voor gebruik tegen de gevel / gevelvrij

Platformhoogte (m)	2,2	3,2	4,2	5,2	6,2	7,2	8,2
Werkhoogte (m)	4,2	5,2	6,2	7,2	8,2	9,2	10,2
Opbouwframe 7 sporten	2	4	4	6	6	8	8
Opbouwframe 4 sporten	2	-	2	-	2	-	2
Wiel met spindel	4	4	4	4	4	4	4
Platform hout met luik	1	1	2	2	3	3	4
Diagonaalschoor	2	2	2	2	2	2	2
Horizontaalschoor	2	2	2	2	2	2	2
Stabilisator 200	-	-	2	2	2	2	-
Stabilisator 300	-	-	-	-	-	-	2
Kantplankset	1	1	1	1	1	1	1
Voorloopleuning	1	1	2	2	3	3	4

6,2M

WERKHOOGTE




ROLSTEIGER 90 CM MET DUBBELE VOORLOOPLEUNING

voor vrijstaand gebruik

Platformhoogte (m)	2,2	3,2	4,2	5,2	6,2	7,2	8,2
Werkhoogte (m)	4,2	5,2	6,2	7,2	8,2	9,2	10,2
Opbouwframe 7 sporten	2	4	4	6	6	8	8
Opbouwframe 4 sporten	2	-	2	-	2	-	2
Wiel met spindel	4	4	4	4	4	4	4
Platform hout met luik	1	1	2	2	3	3	4
Diagonaalschoor	2	2	2	2	2	2	2
Horizontaalschoor	2	2	2	2	2	2	2
Stabilisator 200	-	-	2	2	2	2	-
Stabilisator 300	-	-	-	-	-	-	2
Kantplankset	1	1	1	1	1	1	1
Voorloopleuning	2	2	4	4	6	6	8

6,2M

WERKHOOGTE

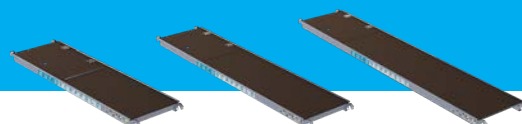

Gerüst Breit

ROLSTEIGER 135 CM MET ENKELE VOORLOOPLEUNING

voor gebruik tegen de gevel / gevelvrij

Platformhoogte (m)	2,2	3,2	4,2	5,2	6,2	7,2	8,2	9,2	10,2	11,2	12,2
Werkhoogte (m)	4,2	5,2	6,2	7,2	8,2	9,2	10,2	11,2	12,2	13,2	14,2
Opbouwframe 7 sporten	2	4	4	6	6	8	8	10	10	12	12
Opbouwframe 4 sporten	2	-	2	-	2	-	2	-	2	-	2
Wiel met spindel	4	4	4	4	4	4	4	4	4	4	4
Platform hout met luik	1	1	2	2	3	3	4	4	5	5	6
Platform hout zonder luik	1	1	1	1	1	1	1	1	1	1	1
Diagonaalschoor	2	2	2	2	2	2	2	2	2	2	2
Horizontaalschoor	2	2	2	2	2	2	2	2	2	2	2
Stabilisator 200	-	-	2	2	2	2	2	2			
Stabilisator 300	-	-	-	-	-	-	-	-	2	2	2
Kantplankset	1	1	1	1	1	1	1	1	1	1	1
Voorloopleuning	1	1	2	2	3	3	4	4	5	5	6

6,2M

WERKHOOGTE



ROLSTEIGER 135 CM MET DUBBELE VOORLOOPLEUNING

voor vrijstaand gebruik

Platformhoogte (m)	2,2	3,2	4,2	5,2	6,2	7,2	8,2	9,2	10,2	11,2	12,2
Werkhoogte (m)	4,2	5,2	6,2	7,2	8,2	9,2	10,2	11,2	12,2	13,2	14,2
Opbouwframe 7 sporten	2	4	4	6	6	8	8	10	10	12	12
Opbouwframe 4 sporten	2	-	2	-	2	-	2	-	2	-	2
Wiel met spindel	4	4	4	4	4	4	4	4	4	4	4
Platform hout met luik	1	1	2	2	3	3	4	4	5	5	6
Platform hout zonder luik	1	1	1	1	1	1	1	1	1	1	1
Diagonaalschoor	2	2	2	2	2	2	2	2	2	2	2
Horizontaalschoor	2	2	2	2	2	2	2	2	2	2	2
Stabilisator 200	-	-	2	2	2	2	2	2			
Stabilisator 300	-	-	-	-	-	-	-	-	2	2	2
Kantplankset	1	1	1	1	1	1	1	1	1	1	1
Voorloopleuning	1	1	2	2	3	3	4	4	5	5	6

6,2M

WERKHOOGTE

